



PEBS - Positron Electron Balloon Spectrometer

H. GAST, P. VON DOETINCHEM, T. KIRN, G. ROPER YEARWOOD, S. SCHAEEL¹.

¹*I. Physikalisches Institut B, RWTH Aachen, Germany*
henning@physik.rwth-aachen.de

Abstract: The observation of an anomaly in the cosmic-ray positron spectrum has been suggested to originate from WIMP annihilations in the halo of the Galaxy. To measure this spectrum in the interesting energy range of 1 – 100 GeV with high precision, we are proposing a dedicated balloon-borne spectrometer (PEBS).

The best measurement of the cosmic-ray positron flux available today was performed by the HEAT balloon experiment more than 10 years ago. Given the limitations in weight and power consumption for balloon experiments, a novel approach was needed to design a detector which could increase the existing data by more than a factor of 100. Using silicon photomultipliers for the readout of a scintillating fiber tracker and of an imaging electromagnetic calorimeter, the PEBS detector features a large geometrical acceptance of 4000 $cm^2 sr$, a total weight of 2300 kg and a power consumption of 600 W . The experiment is intended to measure cosmic ray particle spectra for repeated periods of 20 days at an altitude of 40 km circulating the North or South Pole. A full Geant 4 simulation of the detector concept has been developed and key elements have been verified in a testbeam in October 2006 at CERN.

Introduction

Among the most intriguing open questions in modern physics is the nature of the dark matter, that has been shown to contribute around 22 % to the total energy density of the universe[1]. Certain models, such as supersymmetric extensions to the standard model of particle physics, predict a new particle, the neutralino, which has all the properties required of a dark matter candidate. At the end of their decay chains, positrons and electrons will be produced in equal numbers. Since there is no other known primary source of positrons in the Galaxy, positrons provide an excellent probe for the indirect detection of dark matter. The observation of an excess over the expected secondary flux by the HEAT[2, 3] and AMS-01[4] experiments has sparked some excitement but it needs to be confirmed by a precise measurement.

Detector description

An experiment designed to measure the positron component in the cosmic rays has to fulfill sev-

eral crucial requirements: The geometrical acceptance needs to be larger than 1000 $cm^2 sr$ due to the small flux of positrons and a suppression of the predominant proton background of 10^6 has to be achieved. In addition, a good momentum resolution is necessary for charge sign determination and subsequent electron suppression. The PEBS detector has been designed to meet these requirements. We have conducted a full simulation of the behavior of the experiment using the Geant4 package[5]. In addition, key elements have been verified in a testbeam in October 2006 at CERN.

A mechanical drawing of the PEBS detector including support structure and solar panels can be seen in figure 1. The apparatus has an overall height of 2.2 m .

A magnetic field of mean flux density $B = 0.8 T$ is created by two superconducting Helmholtz coils, located in a helium cryostat. The curvature of a charged particle's trajectory in this field is measured by a scintillating fiber tracker with silicon photomultiplier readout. A transition radiation detector (TRD), located between the tracker superlayers, and an electromagnetic calorimeter at the

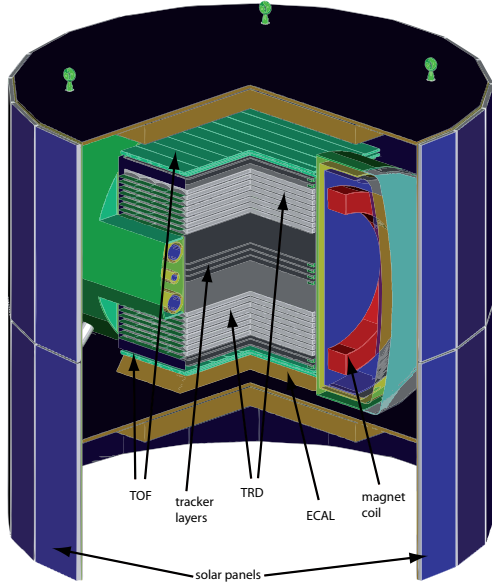


Figure 1: Cutaway mechanical drawing of the PEBS design including support structure and solar panels.

bottom of the experiment provide rejection power against protons. Scintillator panels above and below the tracker act as a time-of-flight system (TOF) and are used for triggering purposes.

Earth's atmosphere prohibits a measurement of GeV -range cosmic rays on the ground. As an interesting alternative to space-based measurements, a high-altitude balloon is chosen. Mission durations of around 40 days can be reached by traveling with the circular arctic winds around the North or South Pole[6].

The geometrical acceptance of the detector is limited by the weight and power constraints imposed by the carrier system. The most important contributions to the overall weight are the magnet weight and the weight of the calorimeter with 850 kg and 600 kg respectively. The power consumption is dominated by the 220 W needed for the tracker which has roughly 50000 individual readout channels.

Figure 2 shows the statistical errors on the positron fraction achievable with the PEBS acceptance of $4000\text{ cm}^2\text{ sr}$ in a 100-day campaign, as compared to the currently available data.

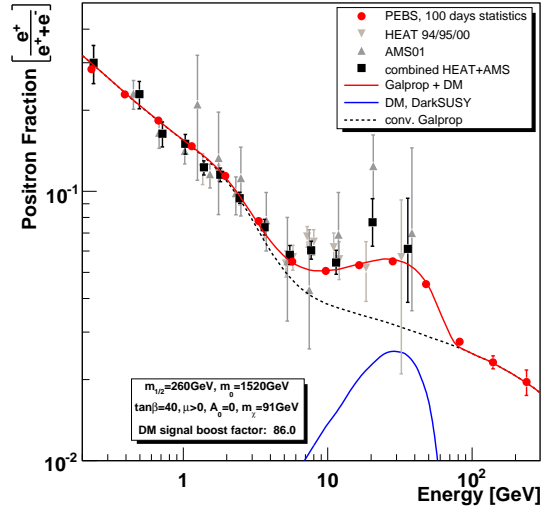


Figure 2: Existing data for the cosmic-ray positron fraction from HEAT[2, 3] and AMS01[4] together with the projected PEBS data. Model predictions have been estimated using DarkSusy[7]. The signal process shown is based on an MSSM model with neutralino dark matter.

Tracker

The tracking device will consist of scintillating fibers grouped into modules and read out by linear silicon photomultiplier arrays (SiPMs). A module comprises two stacks of round fibers of $250\text{ }\mu\text{m}$ diameter, 128 fibers wide and five fibers high, in the tightest arrangement. The stacks are held apart by two carbon fiber skins with Rohacell foam in between. Using scintillating fibers, the material budget in the particles' flight path through the tracker does not exceed 6% of a radiation length, while the TRD will contribute another 6%. The modules will be grouped into eight layers, two of those being located at the entrance and exit of the tracking device respectively, and four in the center. In this arrangement, the uncertainty in momentum determination is minimized[8].

Silicon photomultipliers[9] have the virtues of being insensitive to magnetic fields, having high quantum efficiency, as well as compactness and auto-calibration. They will therefore be used to detect the photons trapped in the scintillating fibers and will be read out by a dedicated VA chip. Fig-

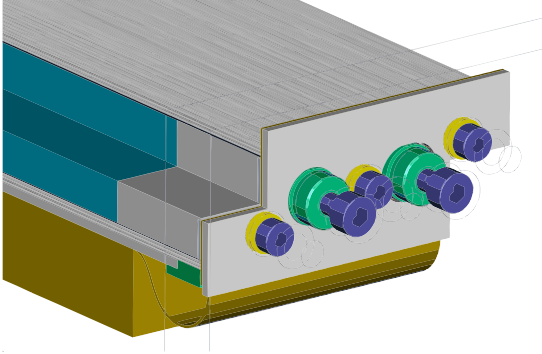


Figure 3: Mechanical drawing of a tracker module showing the two fiber bundles with a corresponding end piece, holding the silicon photomultiplier arrays and covered by a reflective metallization, as well as the support structure composed of carbon fiber skins held apart by Rohacell foam. The front-end electronics board is sketched as a box below the lower fiber bundle.

Figure 3 illustrates the design of a tracker module. Linear arrays containing 32 silicon photomultiplier columns each are located at alternating ends of the fiber bundles. The remaining end of each fiber is covered by a reflective coating to increase the light yield by a factor of roughly 1.6. Five fibers in one column are then optically connected to one SiPM column. The weighted cluster mean from amplitudes in adjacent SiPMs columns will be calculated to pinpoint the intersection of a trajectory with a fiber module.

A prototype of the tracking device, built of two fiber bunches, each consisting of ten stacks of three square fibers of $300\ \mu\text{m}$ width, has been subjected to a $10\ \text{GeV}$ proton testbeam at the CERN T9 beamline. The detailed analysis of the data gathered is presented elsewhere[10].

In addition, a dedicated Monte Carlo simulation, again using the Geant4 package, has been developed for comparison to and generalization of the testbeam results. A key question to be answered was the spatial resolution obtained with a fiber module as a function of the mean photo electron yield $n_{p.e.}$ of the fiber-SiPM chain. Figure 4 shows the result. Testbeam data obtained with a fiber bundle without reflective foil and Photonique SSPM-050701GR SiPM readout are plotted using square

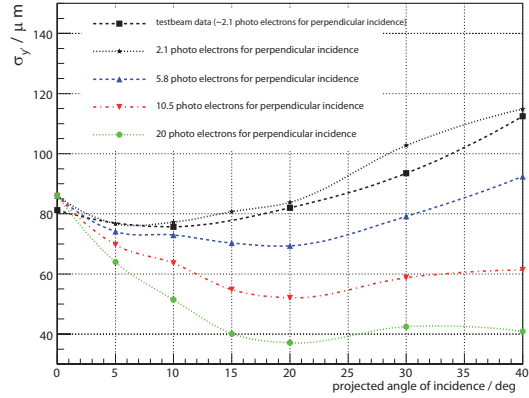


Figure 4: Spatial resolution for a bundle of fibers of $300\ \mu\text{m}$ width from testbeam data and Monte Carlo simulations.

markers. The results from the Monte Carlo simulations are added to study the behavior for improved photo electron yields. A yield of 5.8 photo electrons was reached in the testbeam with SSPM-0606EXP SiPMs and reflective foil, but only data at 0° were taken in this configuration. In the figure, the spatial resolution $\sigma_{y'}$ is plotted for different values of $n_{p.e.}$ as a function of the incidence angle α , projected into the bending plane of the magnet. $\sigma_{y'}$ is the resolution along the axis perpendicular to the fibers. Since the beam telescope used in the testbeam measured the coordinate y perpendicular to the direction of incidence z , $\sigma_{y'}$ is calculated from the measured σ_y and the positioning accuracy $\sigma_z = 10\ \mu\text{m}$ as follows:

$$\sigma_{y'} = \sigma_y \cos \alpha \oplus \sigma_z \sin \alpha \quad (1)$$

For the photo electron yield achieved in the testbeam, a spatial resolution of $70\ \mu\text{m}$ is obtained at the mean projected angle of incidence, which is $\bar{\alpha} = 21^\circ$ for the PEBS geometry.

The full PEBS detector simulation was then used to determine the momentum resolution, achievable with the tracker design for a photo electron yield corresponding to the one reached in the testbeam. Muons in the momentum range up to $100\ \text{GeV}$ were simulated and the reconstructed momentum resolution was parameterized as

$$\sigma \left(\frac{p_{\text{MC}}}{p_{\text{rec}}} \right) = a_{\text{msc}} \oplus b_{\text{res}} \cdot p_{\text{MC}} \quad (2)$$

where p_{MC} and p_{rec} denote generated and reconstructed momentum respectively. In the current configuration, the simulation yields values of $a_{msc} = 2.3\%$ and $b_{res} = 0.194\% / GeV$.

Electromagnetic calorimeter

A sandwich calorimeter for three-dimensional shower reconstruction has been designed to provide rejection power against the predominant proton component in the cosmic rays. It comprises 70 layers consisting of 0.5 mm tungsten interleaved with layers of $6 \times 0.5\text{ mm}^2$ scintillating bars. They are read out by $3 \times 3\text{ mm}^2$ SiPMs with 8100 pixels which are connected to the fibers using light-guides. Seven layers are grouped into a super-layer and super-layers are placed with alternating direction. The total depth of the calorimeter is 10 radiation lengths.

A preliminary cut-based analysis, using the PEBS Geant4 simulation, has been performed to study the proton rejection of this setup. For each event, a shower fit using a standard Gamma function parameterization has been performed and the following variables have been used to distinguish positrons from protons: E/p -match, fitted shower maximum, ratio of shower energy within one Molière radius from the shower axis and angle between the reconstructed track and shower axis.

Proton rejections of the order of 5000 can easily be achieved already with this rather coarse method. The corresponding electron efficiency is around 65%.

Transition radiation detector

The design of the transition radiation detector is based on the one constructed for the AMS-02 experiment on the International Space Station[11]. The TR x-ray photons are generated in a 2 cm thick irregular fleece radiator made of polyethylene and polypropylene. They are subsequently detected in proportional wire chambers in the form of straw tubes made of aluminized kapton foils which have an inner diameter of 6 mm and are filled with an 80 : 20 mixture of Xe/CO₂. The straw tubes are grouped into modules and eight layers each are placed in the gaps above and below the central tracking layers.

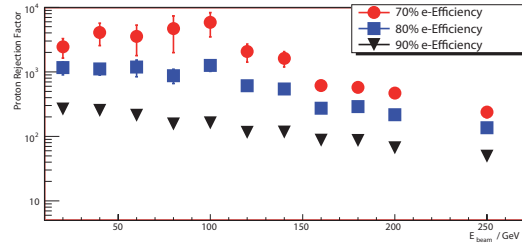


Figure 5: Proton rejection of the TRD alone, for various values of the electron efficiency.

Detailed performance studies using both Monte Carlo and testbeam data have been conducted. The proton rejection yielded by the TRD is depicted in figure 5. It reaches a value of 1000 at 80% electron efficiency in the interesting energy range.

Conclusion

We have presented a design study to construct a balloon-borne cosmic ray spectrometer to measure the positron fraction. Scintillating fibers with SiPM readout are used as key components for the tracker. The necessary proton rejection of the order of 10^6 can be achieved by the combination of a 3D-imaging calorimeter and a 16-layer transition radiation detector.

References

- [1] D. N. Spergel, et al., ApJS 148 (2003) 175.
- [2] M. A. DuVernois, et al., ApJ 559 (2001) 296.
- [3] J. J. Beatty, et al., Phys. Rev. Lett. 93 (2004) 241102.
- [4] M. Aguilar, et al., Phys. Lett. B 646 (2007) 145.
- [5] S. Agostinelli, et al., NIM A 506 (2003) 250.
- [6] E. S. Seo, et al., 29th ICRC Pune 3 (2005) 101.
- [7] P. Gondolo, et al., JCAP 0407 (2004) 008.
- [8] R. L. Gluckstern, NIM 24 (1963) 381.
- [9] B. Dolgoshein, et al., NIM A 563 (2006) 368.
- [10] H. Gast, et al., arXiv:physics/0703158v1.
- [11] P. von Doetinchem, et al., NIM A 558 (2006) 526.